



### Specifications

|                                 |         |                             |
|---------------------------------|---------|-----------------------------|
| Nominal Voltage                 |         | 12 V                        |
| Capacity(10HR, 25°C)            |         | 9Ah                         |
| Dimension                       | Length  | 151 ± 2mm (5.94inch)        |
|                                 | Width   | 87 ± 2mm (3.43inch)         |
|                                 | Height  | 107 ± 2mm (4.21inch)        |
| Approx. Weight                  |         | 3kg (6.61lbs) ± 5%          |
| Operating temperature range     |         | -20°C ~ 50°C (-4°F ~ 122°F) |
| Standard Charging method (25°C) | Current | 0.9A                        |
|                                 | Time    | 5~10h                       |
| Quickly Charging method (25°C)  | Current | 4.5A                        |
|                                 | Time    | 1h                          |
| Terminal material               |         | Lead                        |
| Container Material              |         | ABS                         |


### Dimensions

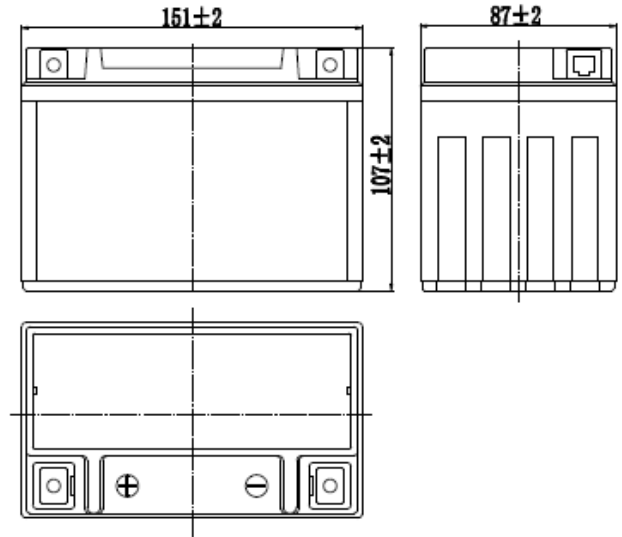

### Terminal



### Discharge Characteristics(25°C)

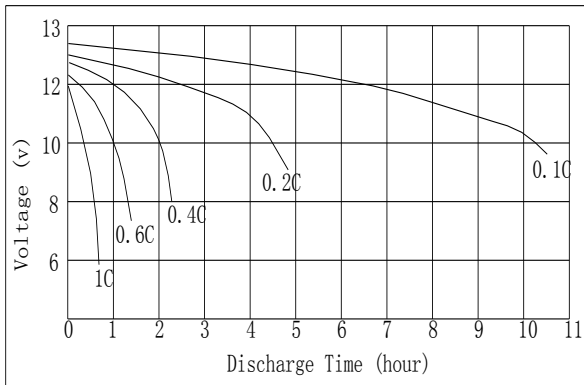

### Self-discharge characteristics

